

**Components**

<p><b>Bottom pivot pin block (prefitted into top of door)</b></p>	
<p><b>Bottom Pivot Socket (screws into floor, pivot hole about 39mm away from frame, but needs individual adjustment)</b></p>	
<p><b>Locator (screws into floor, do this last)</b></p>	
<p><b>Positioner (goes on end of top track before fitting. Don't tighten the two Allen screws until installation complete)</b></p>	
<p><b>Roller (goes in top track to the inside of the positioner)</b></p>	
<p><b>Top pivot pin block (prefitted to top of door)</b></p>	
<p><b>Top pivot socket (fit into top track)</b></p>	

**1 Cut the top single suspended track**

Carefully measure the width of the opening at top and reduce the length measured by about 2-3 mm. Measure off the required track length, marking the future cut line on the tracks. Use a fine-toothed metal cutting saw to cut off the redundant part of the track.

*Advice:*

*The tracks to be installed are supplied about 50 mm longer than the opening width. This spare length will make it possible to avoid measurement errors and it is easy to trim. Take care not to damage the track surface while cutting. In order to facilitate top track cutting, insert 38 mm thick wood blocks or a reversed piece of track into the track. This will prevent track deflection during the cutting process.*

**2 Install the top track**

Before installing the top track, insert the pivot socket, the roller and the positioner into the track. Fix the top track by offsetting it's face by 9mm


*Note: Before inserting the rollers, clean the inside of the suspended top track of any dust that may have accumulated.*

*Avoid applying excessive force when tightening the screws to prevent track deformation. Use cheese head screws for best results. The surface to which the track is fixed must be straight and level. If required, shim between the existing door frame and track, so the track is horizontally level. THIS IS IMPORTANT FOR A GOOD INSTALLATION*

**3 Install the bottom pivot socket**

Determine a plane running vertically along the centre of the top track (e.g. using a plumb line). Position the bottom pivot socket at a distance of 39mm from the side wall of the recess. If your wooden frame is level to the horizontal along the top and the frame is square, then you can just measure from the frame recess at the bottom and it should be in line with the top. The important thing though is that the top guide is horizontally aligned and that the bottom pivot is in line vertically with the top pivot.

*Note: When fixing the hinge, set the screws at the centre of the oblong holes, which will enable you to adjust the position in both directions*

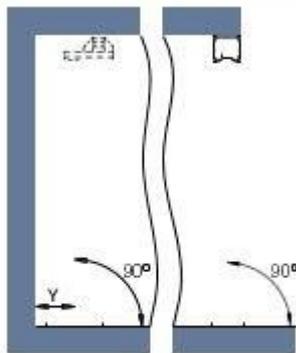


**4 Set the door in place**

Fold the door and set it in place so that the bottom pivot pin sits in the socket. Screw the top roller bolt into the mounting block using a 7mm open ended spanner.

Using a 13mm open ended spanner, unscrew the pivot pin of the top pivot block into the socket.

Move the locating screw block to the stile and fasten the block.


Determine the final door height and set it symmetrically in the opening. Use a level to plumb the door, repositioning the top pivot socket if necessary. Fasten the top pivot socket and lock all nuts.

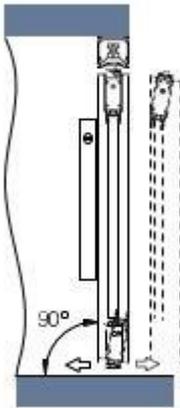

**5 Adjust door**

By turning the top and bottom pivot pins adjust the door vertically so that it's next to the wall when closed. Fasten the top and bottom pivot sockets to keep them in place.

Close the door and adjust the top roller axle so that the door weight is distributed between the door hinge and the roller. By turning the pivot pins the door to floor clearance can be adjusted by 7-17mm

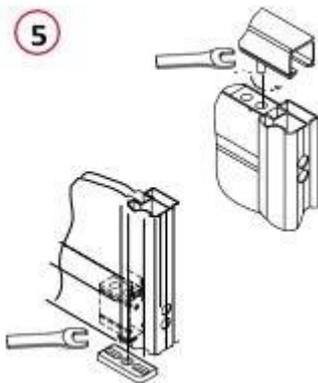

**6 Fix the bottom locator**

Close the door when adjusted, align the locator with the locating screw. Mark the position of the locator and open the door. Fix the locator to the floor with screws.

